



KONICA MINOLTA

LIGHT METERS

ILLUMINANCE METER

LUMINANCE METER

UV RADIOMETER

CHROMA METER

ISO 9001
CERTIFIED
ISO 14001

T-10/T-10M/T-10Ws/T-10W_L
LS-100/LS-110
UM-10
CL-200
CS-100A
DP-10
DP-101

The essentials of imaging

CHROMA METER CS-100A

A compact, lightweight, battery-powered instrument with a 1° measurement angle for high-accuracy non-contact measurements of the luminance and chromaticity of light sources and reflective subjects



MAIN FEATURES

Compact and lightweight

Measurements of subjects at a distance

SLR (single-lens-reflex) viewing system and flare-free optical system provide accurate measurements of subjects at a distance with virtually no influence from light outside the measurement area

Measurements of small subjects

1° measurement angle allows measurements of subjects as small as $\phi 14.4\text{mm}$ (at a subject distance of 1014mm); by using optional Close-Up Lenses, subjects as small as $\phi 1.3\text{mm}$ can be measured.


Color difference can also be measured

Calibration to a user-selected reference is also possible


Luminance units of cd/m^2 or fL can be selected

EASY-TO-READ DISPLAY

Viewfinder Image

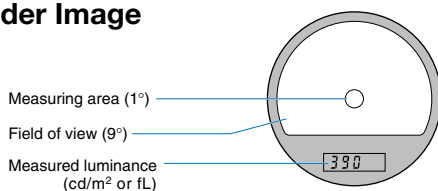

External display



MAIN APPLICATIONS

Light-Source Measurements

- Luminance and chromaticity of small light sources such as LEDs, miniature neon lamps, etc.
- Luminance and chromaticity of general light sources such as tungsten lamps, fluorescent lamps, etc.
- Luminance and chromaticity of traffic signals, airport guidance lights, emergency exit signs, etc.

Reflective-Subject Measurements

- Color measurements of subjects which cannot be measured by contact methods, such as distant building walls, just-painted surfaces, subjects with complicated shapes, or subjects which should not be touched for sanitary reasons.

Display Measurements

- Luminance and chromaticity of color TVs and CRTs
- Luminance measurements of monochrome TVs and SRTs
- Luminance and chromaticity of projection TVs and video projectors.



SPECIFICATIONS

Model	Chroma Meter CS-100A
Type	SLR spot colorimeter for measuring light-source and surface luminance and chromaticity
Acceptance angle	1°
Optical system	85mm f/2.8 lens; SLR viewing system; flare factor less than 1.5%
Angle of view	9° with 1° measurement area indication
Focusing distance	1014mm (40 in.) to infinity
Receptors	3 silicon photocells filtered to detect primary stimulus values for red, green and blue light
Spectral response	Closely matches CIE 1931 Standard Observer curves ($\bar{x}_\lambda, \bar{y}_\lambda, \text{ and } \bar{z}_\lambda$)
Response time	FAST: Sampling time: 0.1s, Time to display: 0.8 to 1.0s; SLOW: Sampling time: 0.4s, Time to display: 1.4 to 1.6s
Luminance units	cd/m ² or fL (switchable)
Measuring range	FAST: 0.01 to 299,000cd/m ² (0.01 to 87,530fL); SLOW: 0.01 to 49,900cd/m ² (0.01 to 14,500fL)
Accuracy	Luminance (Y): $\pm 2\%$ of reading ± 1 digit Chromaticity (x,y): ± 0.004 (Illuminant A measured at ambient temperature of 18 to 28°C/64 to 82°F)
Repeatability	Luminance (Y): $\pm 0.2\%$ of reading ± 1 digit Chromaticity (x,y) : FAST: Y 100cd/m ² or above: ± 0.001 ; 48.1 to 99.9cd/m ² : ± 0.002 ; below 48.1cd/m ² : below measurement range SLOW: Y 25.0cd/m ² or above: ± 0.001 ; 12.0 to 24.9cd/m ² : ± 0.002 ; below 12.0cd/m ² : below measurement range (Measurement subject: Illuminant A)
Target value	1; set by measurement or numerical input
Measurement modes	Absolute color: Yxy; color difference: $\Delta(Yxy)$
Display	External: LCD; 3 values (Y, x, and y) of 3 digits each with additional indications Viewfinder: 3-digit LCD (showing luminance value Y) with LED backlight
Data communication	RS-232C; baud rate: 4800bps
External control	Measurement process can be started by external device connected to data output terminal
Power source	One 9V battery; power can also be supplied via data output terminal
Operating temperature /humidity range	0 to 40°C, relative humidity 85% or less (at 35°C) with no condensation
Storage temperature/humidity range	-20 to 55°C, relative humidity 85% or less (at 35°C) with no condensation
Dimensions	79x208x154mm (3-1/8x8-3/16x6-1/16 in.)
Weight	890g (2 lb.) without battery
Standard accessories	Lens cap; Eyepiece cap; Protective filter, ND eyepiece filter; 9V battery; Chromaticity chart; Case

Specifications are subject to change without notice.

OPTIONAL ACCESSORIES

Data Processor DP-101

Compact, portable, multi-function data processor to increase the versatility of Minolta Chroma Meter CS-100A

Additional Color Notations

When DP-101 is used with the CS-100A, measured values can be calculated in terms of Yxy, L*a*b*, Yu'v', color temperature, and distance from blackbody locus Δuv for absolute color values and in terms of $\Delta(Yxy)$, $\Delta(L*a*b*)$, ΔE^*ab , $\Delta(Yu'v')$, and $\Delta u'v'$ for color difference.



Data Storage and Printout

DP-101 has memory space for up to 300 sets of measurement data and a built-in thermal printer for printing out data either at the time of measurement or from memory at a later time.

Interval Timer for Automatic Measurements

SPECIFICATIONS

Type	Battery-powered multi-function data processor for use with Konica Minolta Chroma Meter CS-100A
Measurement modes	Absolute and difference
Chromatic systems	Absolute color: Yxy, Yu'v', L*a*b*, color temperature, distance from blackbody locus Δuv Color difference: $\Delta(Yxy)$, $\Delta(Yu'v')$, $\Delta u'v'$, $\Delta(L*a*b*)$, ΔE^*ab
Calibration channels	4
Target color channels	17 (4 for each calibration channel and 1 quick-input temporary target-color channel); set by measurement or numerical input
Data memory	Space for 300 sets of measurement data divisible into 16 pages; built-in NiCd battery for backup maintains data in memory even if POWER switch is set to OFF
Display	16-character x 2-line dot-matrix LCD with adjustable viewing angle
Printer	24-character thermal-dot
Statistical calculations	Maximum, minimum, mean, and standard deviation
Interval timer	Timer interval user-selectable from 3s to 99m
Data communication	RS-232C format; transmission rate: 9600 baud (can be set by service personnel to 600, 1200, 2400, or 4800; output voltage: CMOS $\pm 5V$; RS-232C terminal uses DIN 8-pin connector)
Other	Multiple-measurement-averaging mode; remote-control socket; can supply to CS-100A
Power source	6 AA-size batteries or included AC Adapter
Dimensions	220x50x200mm (8-11/16x2x7-7/8 in.)
Weight	1300g (2.87 lb.) not including batteries
Standard accessories	Data Cable DP-A12; AC Adapter AC-A11; thermal paper (one roll); DIN 8-pin plug (1); 3.5mm (1/8-inch) subminiature plug; Shoulder Case DP-A30

Specifications are subject to change without notice.

Close-Up Lenses



Close-Up Lenses	Minimum measuring area
No. 153	$\phi 8.0\text{mm}$
No. 135	$\phi 5.2\text{mm}$
No. 122	$\phi 3.2\text{mm}$
No. 110	$\phi 1.3\text{mm}$

Long Eye-Relief Eyepiece




When the Long Eye-Relief Eyepiece is used, the measuring area and measurement display inside the viewfinder can be seen with the eye 5cm (2 in.) away from the eyepiece.

Angle Finder Vn



Angle Finder Vn allows the measuring area and measurement display inside the viewfinder to be seen at an angle of 90° to the normal viewfinder optical axis. Angle Finder Vn can also be focused and the magnification can be set to 1x or 2x.

SYSTEM DIAGRAM (Optional Accessories)

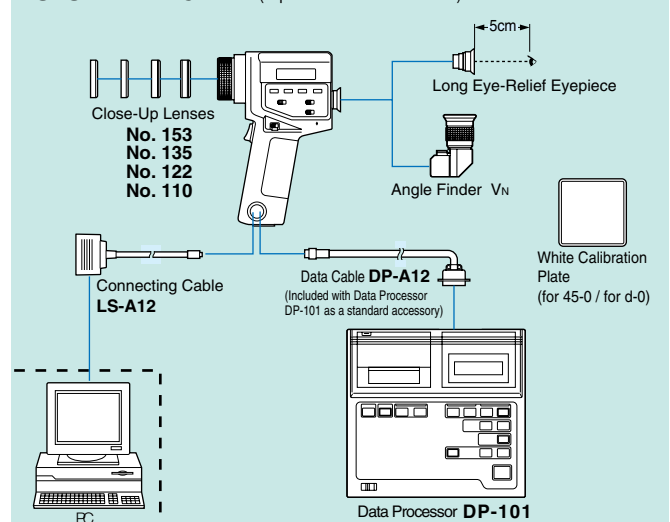



KONICA MINOLTA

SAFETY PRECAUTIONS

To ensure correct use of the instrument, please adhere to the following.



- Before using the instrument, be sure to read the instruction manual.
- Always use the specified power. Use of inappropriate power may result in fire or electric shock.



The manufacturing center of Konica Minolta Sensing Inc. (Location: Aichi Pref., Japan) was approved by the British certification organization Lloyd's Register Quality Assurance for certification under the ISO 9001: 1994 international quality management system standards on March 3, 1995. Since its establishment in 1990, the center has carried out the development and production of precision instruments and associated application software for the measurement of color, light, and shape.

Certification was awarded to the center's quality management system, including design, manufacturer, management of manufacture, calibration and servicing. Certification was carried over to the ISO 9001: 2000 standards in February, 2003.

KONICA MINOLTA SENSING, INC.

Konica Minolta Photo Imaging U.S.A., Inc.
Konica Minolta Photo Imaging Canada, Inc.
Konica Minolta Photo Imaging Europe GmbH
Konica Minolta Photo Imaging France S.A.S.
Konica Minolta Photo Imaging UK Ltd.
Konica Minolta Photo Imaging Austria GmbH
Konica Minolta Photo Imaging Benelux B.V.
Konica Minolta Photo Imaging (Schweiz)AG
Konica Minolta Business Solutions Italia S.p.A.
Konica Minolta Photo Imaging Svenska AB
Konica Minolta Photo Imaging (HK)Ltd.
Shanghai Office
Konica Minolta Photo Imaging Asia HQ Pte Ltd.
KONICA MINOLTA SENSING, INC. Seoul Office

3-91, Daisennishimachi, Sakai.Osaka 590-8551, Japan

725 Darlington Avenue, Mahwah, NJ 07430, U.S.A. Phone: 888-473-2656 (in USA), 201-529-6060 (outside USA) FAX: 201-529-6070
1329 Meyerside Drive, Mississauga, Ontario L5T 1C9, Canada Phone: 905-670-7722 FAX: 905-795-8234
Europaallee 17, 30855 Langenhagen, Germany Phone: 0511-740440 FAX: 0511-741050
Paris Nord II, 385, rue de la Belle-Etoile, B.P. 50077, F-95948 Roissy C.D.G. Cedex, France Phone: 01-49386550 / 01-30866161 FAX: 01-48638069 / 01-30866280
Precedent Drive, Rooksley Park, Milton Keynes United Kingdom Phone: 01-908200400 FAX: 01-908618662
Amalienstrasse 59-61, 1131 Vienna, Austria Phone: 01-87882-430 FAX: 01-87882-431
Postbus 6000, 3600 HA Maarssen, The Netherlands Phone: 030-2470860 FAX: 030-2470861
Riedstrasse 6, 8953 Dietikon, Switzerland Phone: 01-7403727 FAX: 01-7422350
Via Stephenson 37, 20157, Milano, Italy Phone: 02-39011-1 FAX: 02-39011-219
Solnastrandvägen 3, P.O.Box 9058 S-17109, Solna, Sweden Phone: 08-627-7650 FAX: 08-627-7685
Room 1818, Sun Hung Kai Centre, 30 Harbour Road, Wanchai, Hong Kong Phone: 852-34137508 FAX: 852-34137509
Rm 1211, Ruijin Building No.205 Maoming Road (S) Shanghai 20020, China Phone: 021-64720496 FAX: 021-64720214
10, Teban Gardens Crescent, Singapore 608923 Phone: +65 6563-5533 FAX: +65 6560-9721
801, Chung-Jin Bldg., 475-22, BangBae-Dong, Seocho-ku, Seoul, Korea Phone: 02-523-9726 FAX: 02-523-9729